



Overview

The EZ Gateway KNX to BACnet (FS-EZX-KNX-BAC) is an easy-to-use, high-performance building and industrial automation protocol gateway for integrators to interface KNX certified products to BACnet management systems in commercial buildings, campuses, and industrial facilities. KNX-certified products encompass a wide range of applications such as lighting control, heating, ventilation and air conditioning control, shutter/blind and shading control, alarm monitoring, energy, gas, and water metering, and audio and video distribution. The EZ Gateway KNX to BACnet integrates such KNX-based devices and systems to BACnet-based management systems over BACnet MS/TP or BACnet/IP protocols.


The EZ Gateway KNX to BACnet combines field-hardened KNX and BACnet protocol drivers with an easy to use configuration interface. The EZ Gateway’s KNX interface is compatible with all KNX-certified products, while the EZ Gateway’s BACnet interface has been certified by BACnet Test Laboratory (BTL), at Version 12. The intuitive web-based interface allows configurations to be built in the field or in the office, thereby simplifying the commissioning and integration process.


Sierra Monitor’s unique FieldServer DeviceProxy™ feature allows each KNX device to be presented as a corresponding virtual BACnet device within the EZ Gateway, thereby providing granular visibility and control over each KNX device from within a BACnet management framework. For example, offline / online status is visible at the individual KNX device.

With the EZ Gateway KNX to BACnet, the integrator/contractor does not need to be a protocol expert, and can minimize configuration and commissioning time, while also reducing ongoing operating and maintenance costs.

EZ Gateway Features and Benefits

- Protocols supported:
 - KNX
 - BACnet/IP
 - BACnet MS/TP
- Built-in KNX data map graphical user interface
- Import of XML and ESF file types is available for easy data mapping
- Supports up to 500 or 1,000 KNX points
- No additional software needed for configuration
- BACnet COV support provides fast data communication while reducing BACnet network traffic
- BACnet BBMD Server support for connecting to remote BACnet networks
- Device Proxy supports virtual nodes, allowing each KNX device connected to a EZ Gateway to be seen as a separate device on the BACnet network
- Web Interface allows drag-and-drop functionality for speedy setup and configuration
- Diagnostics information for devices connected to the EZ Gateway can be viewed via Web Interface
- BTL certified to revision 12
- **SMC Cloud** registration connects your devices to the cloud, allowing secure remote access for diagnostics, monitoring, alarming and configuration
- On-board diagnostics allow easy troubleshooting for both serial and Ethernet communications

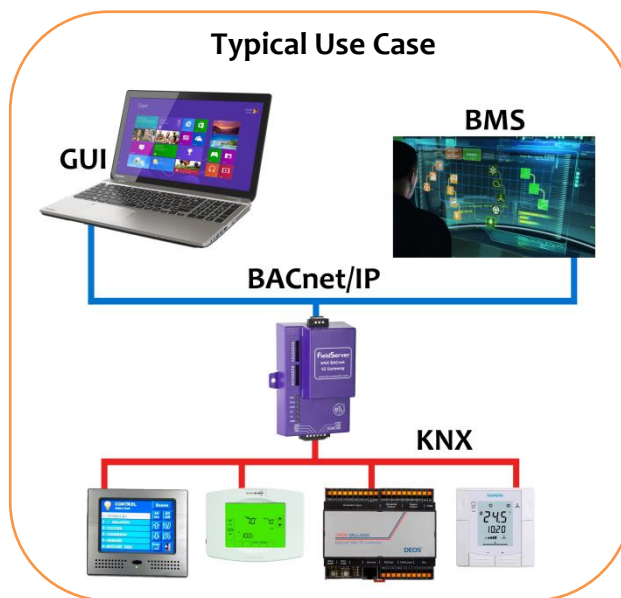

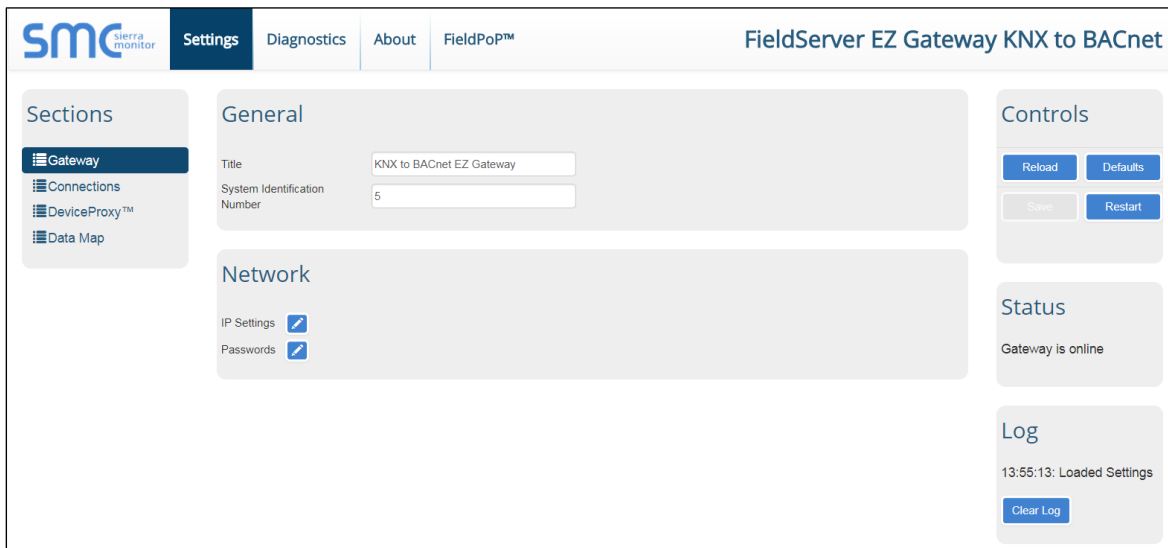

Configuration

The Web Interface is used to configure the KNX and BACnet connections, and mappings are created for each KNX device to be connected to the EZ Gateway. Specific KNX data points are mapped through to BACnet objects making integration easy and efficient.

Specifications*

Environment

Operating temperature: -40 to 75°C (-40 to 167°F)

Relative humidity: 5-90% RH non-condensing

Power Requirements

9-30VDC or 12-24VAC

Current Draw: @ 12V

FS-EZX-KNX-BAC: 240 mA

Physical Dimensions

H x W x D: 4.5 x 2.9 x 1.6 in. (11.5 x 7.4 x 4.1 cm)

Weight: 0.4 lbs (0.2 Kg)

Other

Configuration/Diagnostic utilities

Capacity: 500 points FS-EZ1-KNX-BAC

1,000 points FS-EZ2-KNX-BAC

Table, Wall or DIN rail mount

Communication

Baud: 9600

Start Bit: 8

Stop Bit: 1

Parity: Odd

Ethernet:10/100 BaseT MDIX

Approvals

CE and FCC

TUV Approved to UL 916, EN 60950-1, EN 50491-3
and CSA C22.2 standards

BTL Certified Rev 12

RoHS and WEEE Compliant

GOST-R Certified



*Specifications subject to change without notice

Ordering Information

The EZ Gateway KNX to BACnet is available in multiple point count configurations.

- FS-EZ1-KNX-BAC 500 Points
- FS-EZ2-KNX-BAC 1,000 Points

Options

The Accessory Kit consists of a power supply, Ethernet cable, screwdriver, DIN rail mount and a USB flash drive that includes all manuals, data sheets, notes and the discovery tool.

- FS-8915-36-QS Accessory Kit, 110/220V

BACnet® is a registered trademark of ASHRAE
KNX® is a registered trademark of the KNX Association